


GIRDER CLAMPS

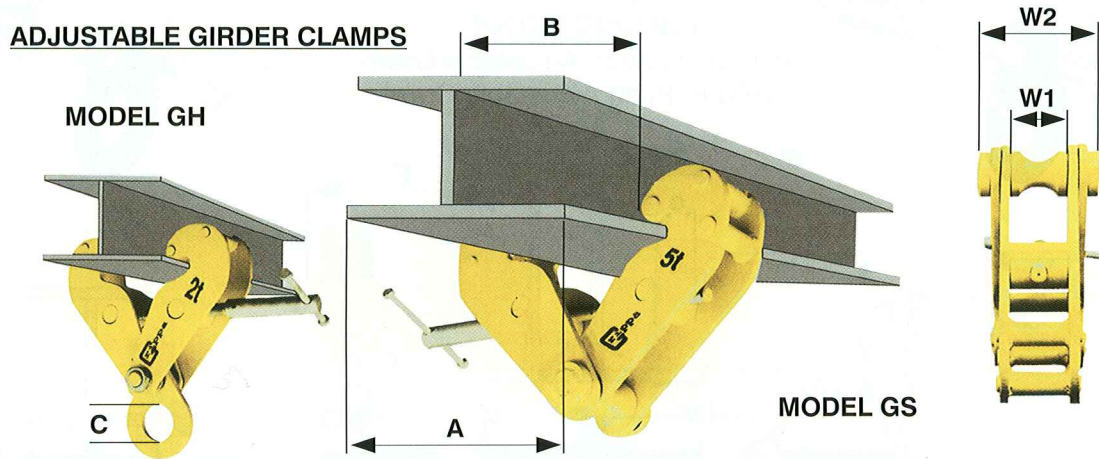

100% Stainless Steel Clamps Available Upon Request.

Specifications & Dimensions (in)

MODEL	S.W.L. (kg)	S.W.L. (lbs)	APERTURE		WIDTH		HOLE "C"	WEIGHT (lbs)	Beam Aperture (in)
			"A"	"B" MAX	W1	W2			
GS1	1000	2200	2.9-7.1	7.1	2.64	3.54	NA	11	0.63
GS2	2000	4400	2.9-9.8	9.8	3.35	4.13	NA	13	0.78
GS3	3000	6600	3.3-11.8	11.8	3.74	5.12	NA	22	0.94
GS5	5000	11 000	4.7-16.9	16.9	3.94	6.1	NA	38	1.75
GS10	10 000	22 000	7.8-17.7	17.7	6.69	8.86	NA	126	2.55
GS20	20 000	44 000	7.8-18.9	18.9	7.28	7.87	NA	137	2.95
GS32	32 000	70 500	8.0-18.8	*	*	*	*	*	2.95
GH1	1000	2200	2.9-7.1	7.1	2.64	3.54	1.38	13	*
GH2	2000	4400	2.9-9.8	9.8	3.35	4.13	1.97	15	*
GH3	3000	6600	3.3-11.8	11.8	3.74	5.12	2.95	24	*
GH5	5000	11 000	4.7-16.9	16.9	3.94	6.1	2.95	42	*
GH10	10 000	22 000	7.8-17.7	17.7	6.69	8.86	4.72	135	*
GH20	20 000	44 000	7.8-18.9	18.9	7.28	9.45	4.72	139	*

*GS Model Units are Standard Stock